


SK-ST4Q120V24-Cx

SMD3014 120LEDs/m

Side view series



SMD
3014

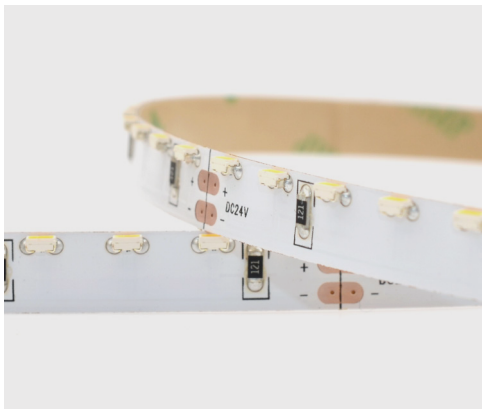


Product Features

Side View Flexible LED Strip Light Side View LED Strip Series This is a strip designed for some special sign using, to satisfy some special needs, which the light emitted from side compare to the top SMD LED strip.



Structure & Parameter

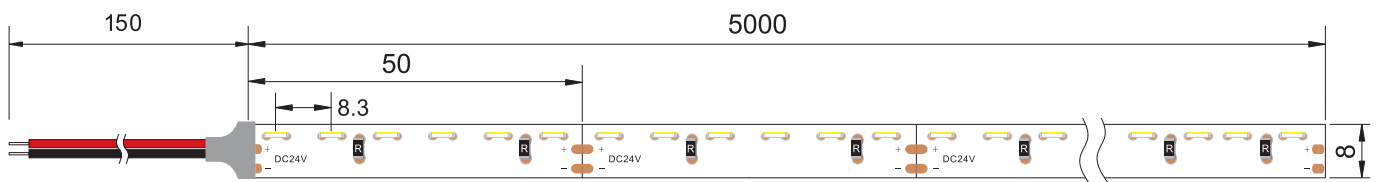


Optical Parameter

Model No	SK-ST4Q120V24-Cx
Input voltage	DC 24V
Power/m	11.3w
Max current / LED	23mA
CRI(Ra)	80Ra
Color temperature	2700k/3000k/4000k/6000k
Lumen / m	913lm/967lm/1025lm/1056lm

Basic Parameter


LED Q'ty/m	120LEDs/m
SMD Type	3014
Working hour	30000h
Warranty	3years
Working temperature	-20 C ~+45 C
Minim cuttable length	50mm
PCB Width	8mm

Voltage & Current Curve

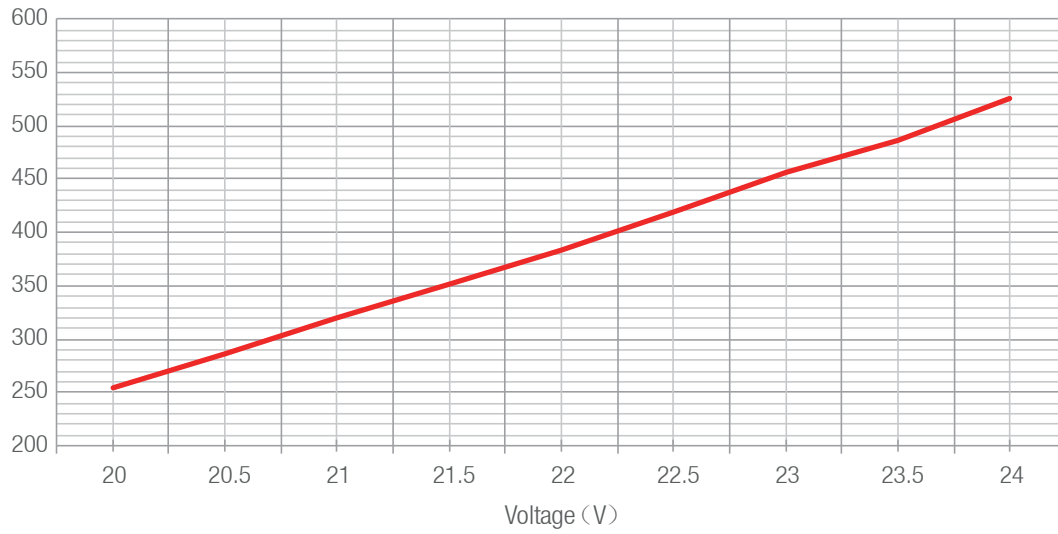


Note: This curve is tested when the IP20 1M LED Strip is under thermal stability after 2h continuous working in 15°C room temperature.

Temperature & Current Curve

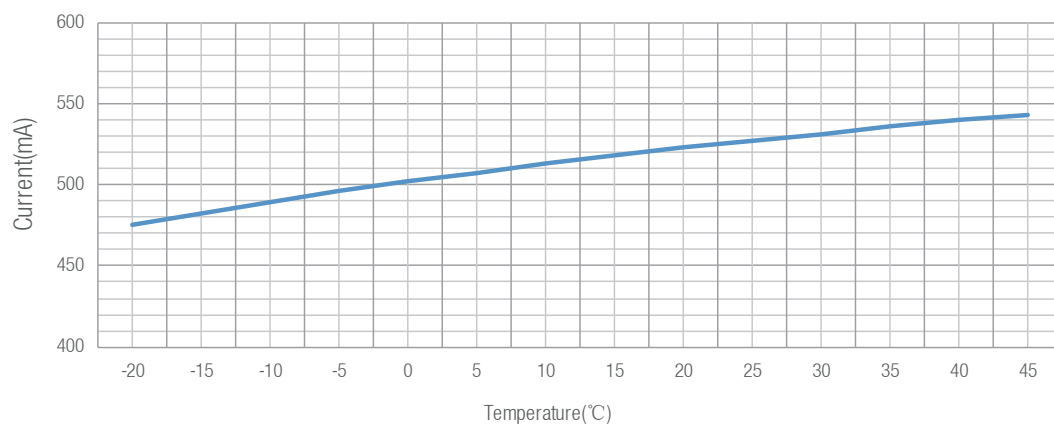


Note: This curve is test data of 1M LED Strip.


Light Distribution Curve [Unit: cd]

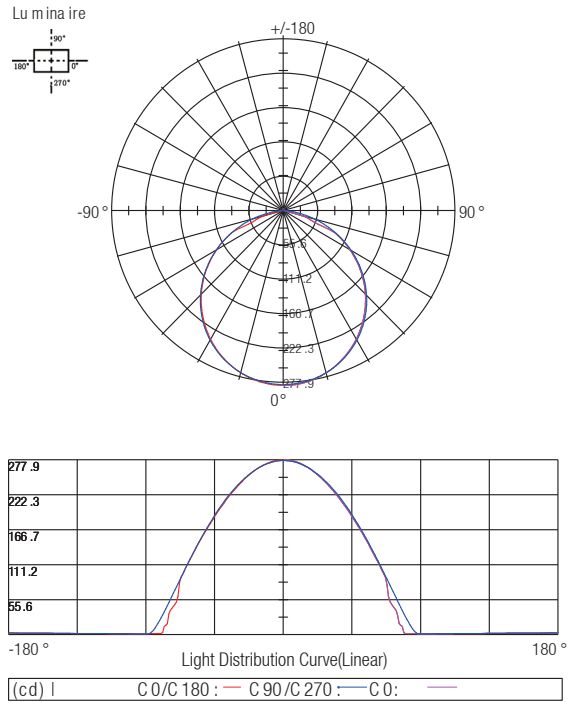

Lux-Distance Curve

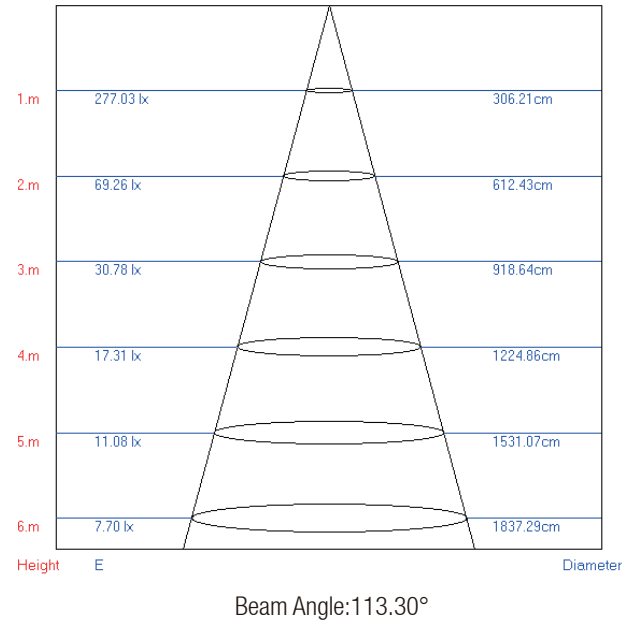


Installation Diagram

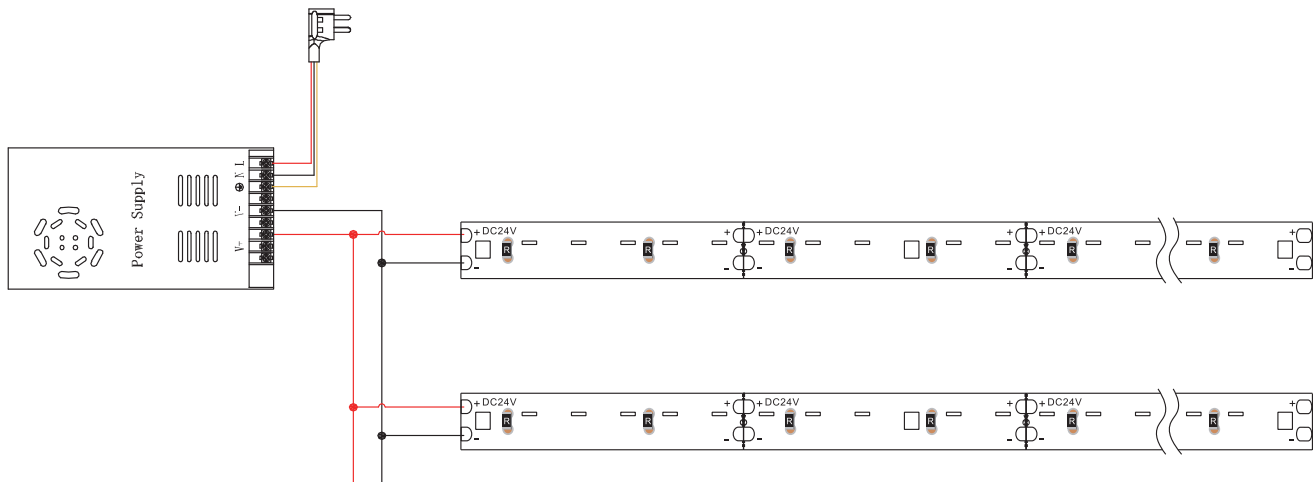

! Cautions


When install the led strip,please note the installation technique.The led strip can be bent,but not distorted,as shown below.

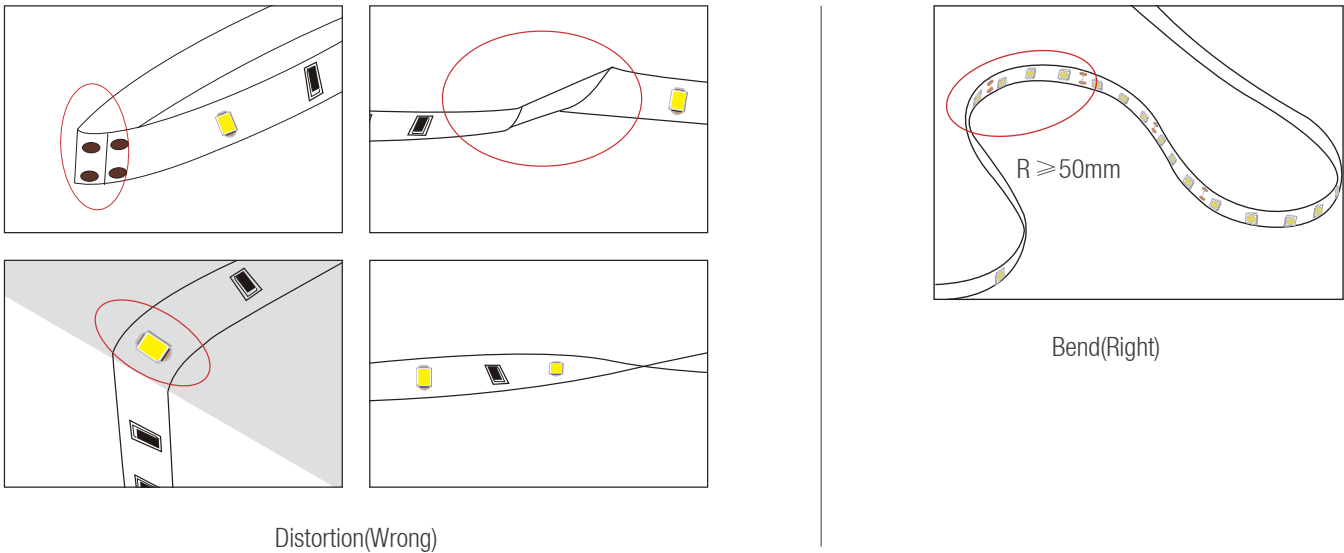

➤ LED strips are low voltage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.

➤ Clean up the installation surface,it will ensure the reliability of the adhesive,The electrical connection process must be operated by a professional person.

📦 Package

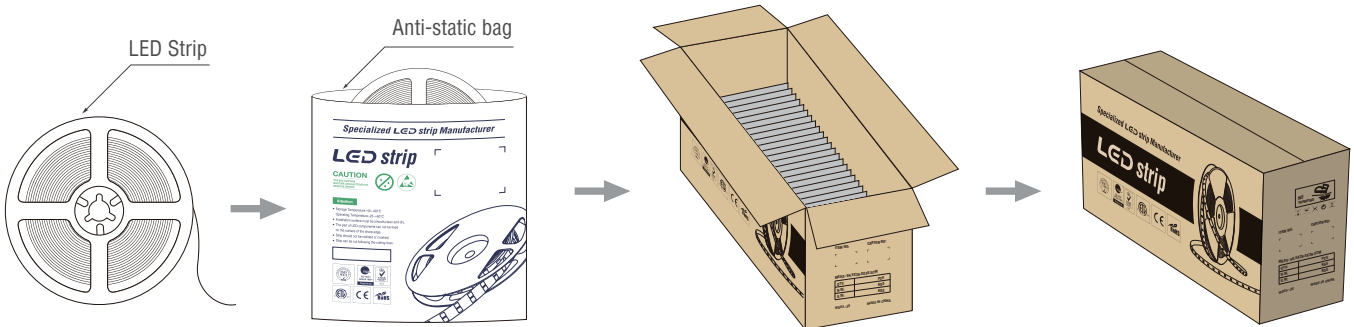

S H I N E S K Y

**Specialized
LED strip
Manufacturer**

SHENZHEN SHINESKY OPTOELECTRONICS CO.,LTD



Building 29, Shancheng Industrial Park, Shiyan Street, Bao'an District,
Shenzhen, Guangdong, China.



OUR EMAIL

director@shineskygroup.com



OUR PHONE

Tel: 0755-29516255



OUR WEBSITE

www.strip-lights.com