

SK-ST5Q60V24-Crgbo

SMD5050 RGB0 4 in 1 60LEDs/m





Product Features

Using Top LEDs with high lumen, pure copper PCB for good heat;

Popular 4 in 1 RGB+Orange tunable functions combines;

Different densitiy and PCB width for more choice;

Suitable kinds of controllers and amplifiers;














Structure & Parameter



Optical Parameter




Basic Parameter


Input voltage	DC24V
Power/m	19W
Max current / LED	80mA
Beam angle	120°
LEDs /m	60leds
SMD Type	5050RGB0
Working hour	30000h
Working temperture	-25 °C ~+45 °C
Cuttable length	100mm
PCB Width	12



Cautions

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below.

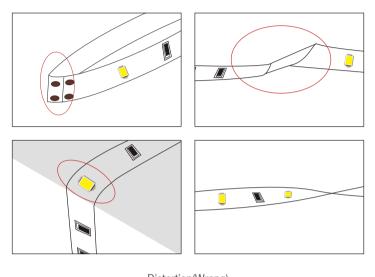




Bend(Right)

- Distortion(Wrong)
- LED strips are low votage products, you must use the power supply(transformer). Please don,t connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.
- Clean up the installation surface, it will ensure the reliability of the adhesive, The electrical connection process must be operated by a professional person.

Package

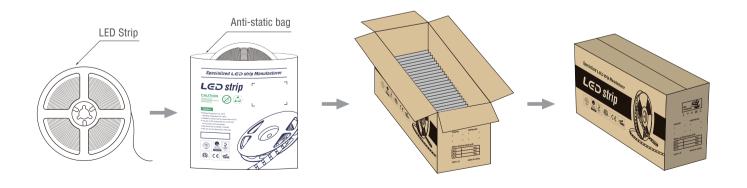

SMD5050 RGBO 4 IN 1



Certification















SHENZHEN SHINESKY OPTOELECTRONICS CO.,LTD



Building 29, Shancheng Industrial Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, China.





